



### Product Details :-

Code :LFLF100S  
Model : Flood light With SMD

### Electrical Data :-

Working voltage range : 100 - 277 VAC  
Input voltage : 220 - 240 VAC  
Power : 100 Watt  
Power factor : > 0.95  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver registration No. : BIS-IS15885-2-13:2012,  
R-63000353  
& IS16104:2012  
Driver Efficiency : > 85%


### Light Data :-

LED Type : SMD LED, LM80 Certified  
System efficacy : >100lm/W  
Beam angle : 120°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 70  
Glass : Toughened glass  
Reflector : Polycarbonate reflector  
LED Life time : 50,000 hours

### Environmental :-

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10 °C to + 85 °C  
IP rating : IP65

### Light distribution :-

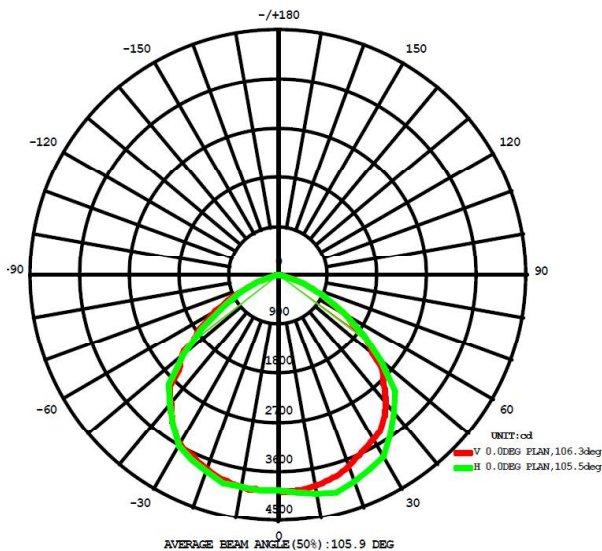

### Physical Details :-

Material : LM6 grade aluminum or higher grade  
Product finish : Powder coated and water proof  
Construction : Pressure die cast aluminum enclosure  
Fixture Dimensions : L 338mm x W 295mm x H 85mm  
Weight : 3.5 Kgs apprx.,  
Mounting type : Wall mount / Suspension


### Protections :-

Output Over voltage / Under voltage protected : Provided  
Output Over current and Short circuit : Provided  
Surge protection : Inbuilt driver4KV, External 10KV

### Applications

: Indoor, Outdoor & Industrial

### AAI Curve :-

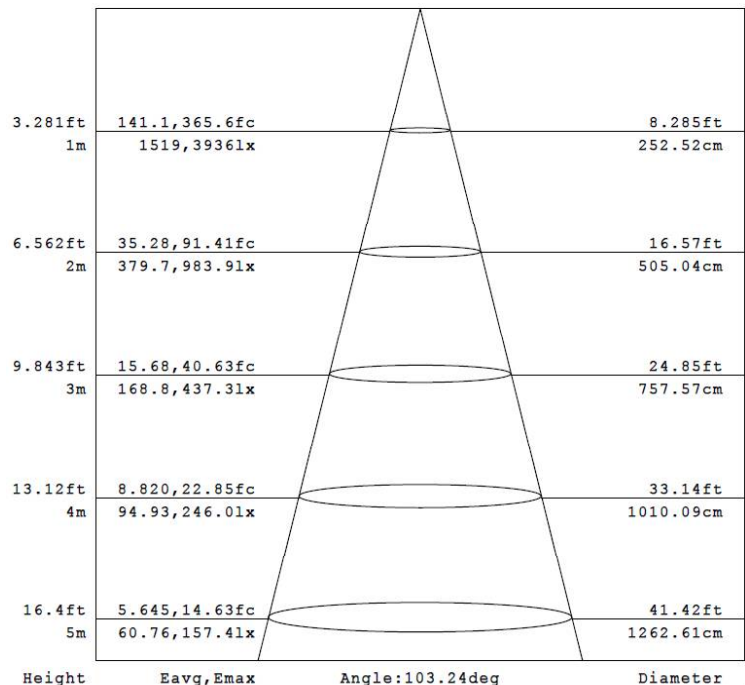

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

