



Product Details :-

Code : LCZ30R/3
Model : Zoom COB light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 30 Watt
Power factor : > 0.9
Frequency : 50 Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Make : COB LED, LM80 certified
System efficacy : >80lm/W
Beam angle : 24°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 70
Reflector : Polycarbonate reflector
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP20

Light distribution :-

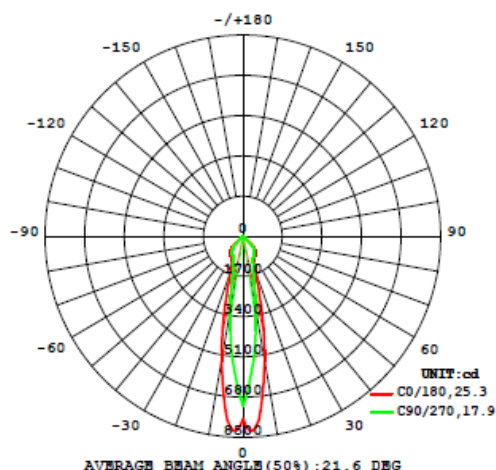

Physical Details :-

Material & construction : Pressure die cast aluminum enclosure
Fixture Dimensions : Dia 155mm x H 125mm
Cut out : Dia 130mm
Suitable fixing : Flase ceiling

Applications : Indoor & commercial



* On all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered