



# FortuneArrrt LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,  
Gundlapochampally, Hyderabad - 500014  
Web : www.fortunearrt.com

## Product Technical specification

FA-F/DD-PS 1506

### Product Details :-

Code : CAC46  
Model : Architecture series

### Electrical Data :-

Working voltage range : 100 - 277VAC  
Input voltage : 220 - 240VAC  
Power : 25 Watt  
Power factor : > 0.95  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver efficiency : > 85%


### Light Data :-

LED Type : COB, LM80 Certified  
System efficacy : >80lm/W  
Beam angle : 24°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 70  
Reflector : Polycarbonate reflector  
Top trim color : Gold color  
LED Life time : 50,000 hours

### Environmental :-

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10°C to + 85 °C  
IP rating : IP20

### Light Distribution :-

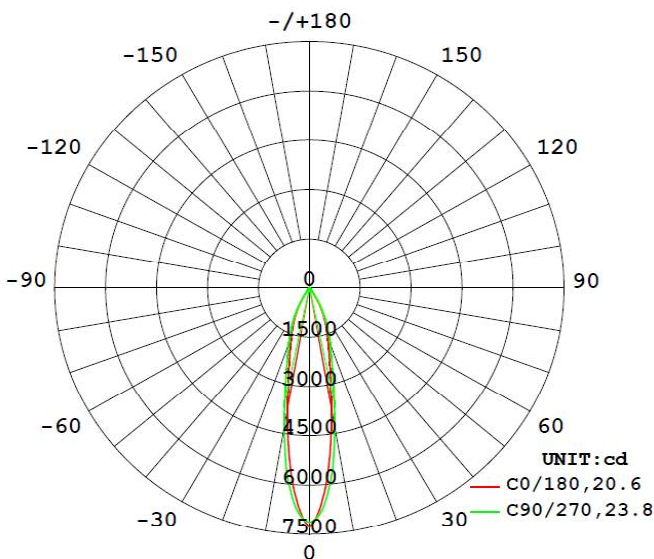

0 Maintenance

50% ENERGY SAVING

ZERO Mercury

### Physical Details :-

Material & Construction : Pressure die cast aluminum casing  
Fixture Dimensions : Dia 105mm x H 112mm  
Suitable fixing : False ceiling  
Ceiling cutout : 98mm Dia

**Applications : Indoor & Architectural lighting**

- \* On all electrical parameters (+/- 10%) tolerance to be considered
- \* On all mechanical dimensions & weight (+/- 5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



VER3.24