



Product Details :-

Code : LC25R/10

Model : COB light

Electrical Data :-

Working voltage range : 100 - 277VAC

Input voltage : 220 - 240VAC

Power : 25 Watt

Power factor : > 0.9

Frequency : 50 Hz

THD : < 15%

Driver : Constant current active
Powerfactor corrected

Driver efficiency : > 85%

Light Data :-

LED Make : COB LED, LM80 certified

System efficacy : >80lm/W

Beam angle : 42°

CCT range : 2700 - 6500K

CRI (Ra) : Typical 70

Reflector : Polycarbonate reflector

LED Life time : 50,000 hours

Environmental :-


Working temperature : 0°C to + 55 °C

Working humidity : 10 to 90% RH

Storage temperature : -10 °C to + 85 °C

IP rating : IP20

Light Distribution :-

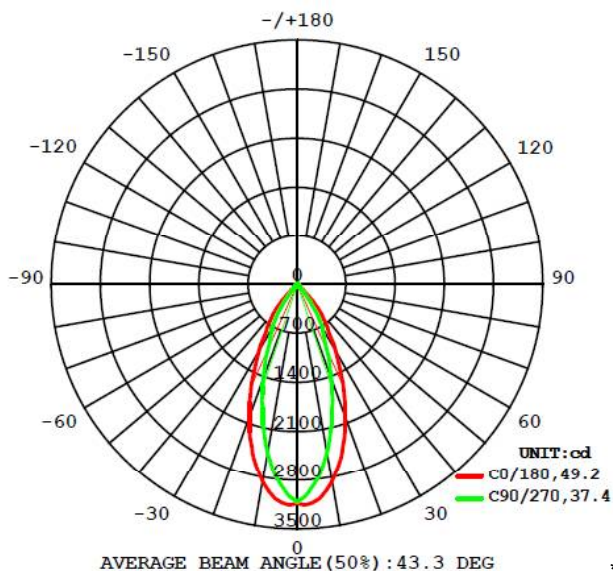

Physical Details :-

Material & construction : Pressure die cast aluminum enclosure

Fixture Dimensions : Dia 150mm x H 160mm

Cut out Dimensions : Dia 135 mm

Suitable fixing : Flase ceiling

Applications : Indoor & commercial



* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

