



**Product Details :-**

Code : LCZ25R/5  
Model : Zoom Cob light

**Electrical Data :-**

Working voltage range : 100 - 277VAC  
Input voltage : 220 - 240VAC  
Power : 25 Watt  
Power factor : > 0.9  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver efficiency : > 85%


**Light Data :-**

LED Type : COB, LM80 Certified  
System efficacy : >80lm/W  
Beam angle : 42°  
CCT range : 2700 - 6500K  
CRI : Typical 70  
Reflector : Aluminum reflector  
LED Life time : 50,000 hours

**Environmental :-**

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : 0°C to + 85 °C  
IP rating : IP20

**Light Distribution -**

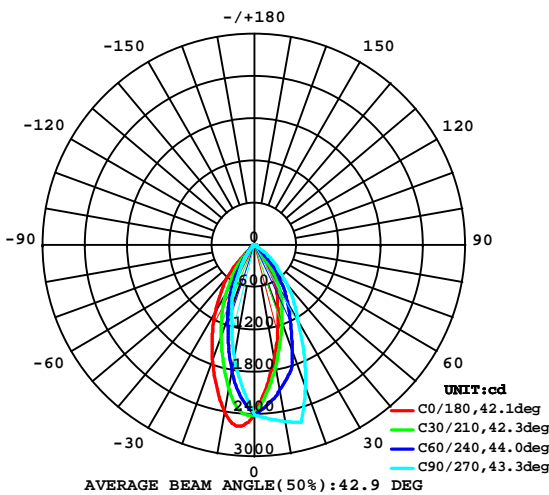


**Physical Details :-**

Material : LM6 Grade or higher grade aluminum  
Construction : Pressure diecast enclosure  
Fixture Dimensions : Dia 172 mm x H 102 mm  
Cut out Diameter : Dia 148 mm  
Suitable fixing : Flase ceiling

**Applications : Indoor & Commercial**

**AAI Curve -**

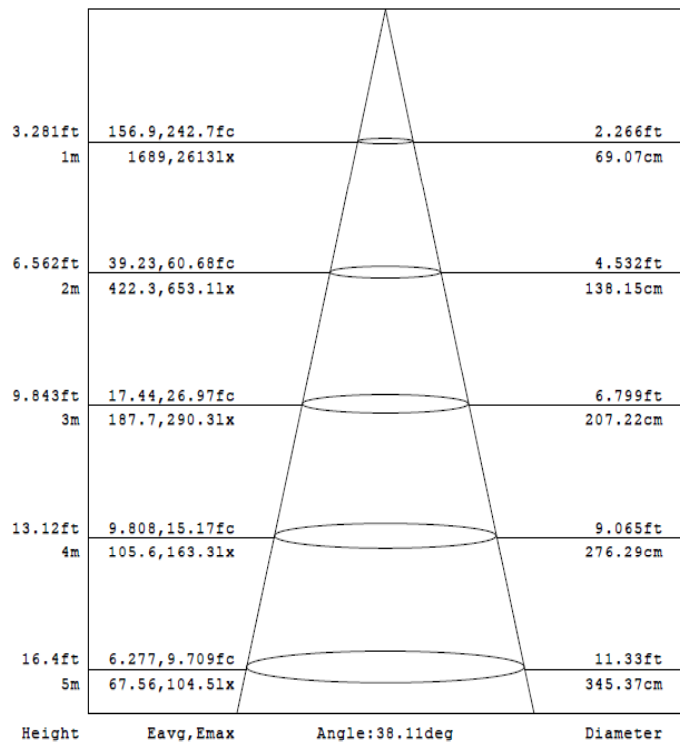

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered  
\* On all electrical parameters (+/-10%) tolerance to be considered

Note : The above specification are subjected to change without prior notice