



Product Details :-

Code : LCZ30R/1
Model : Cob light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 30 Watt
Power factor : >0.9
Frequency : 50 Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Type : COB, LM80 Certified
System efficacy : >80lm/W
Beam angle : 32°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 70
Reflector : Polycarbonate reflector
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0 °C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP20

Light Distribution -

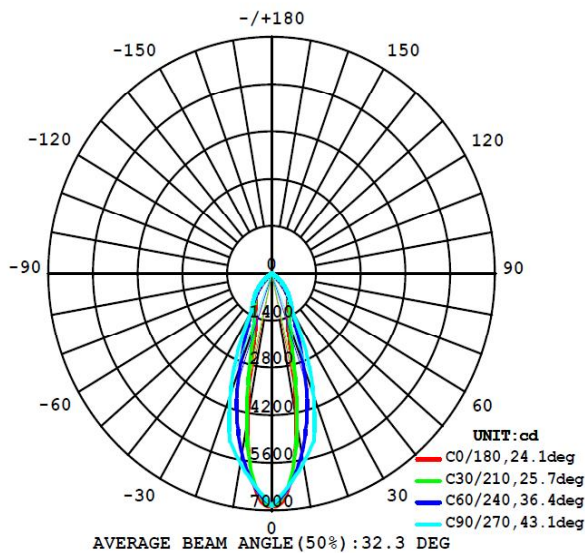


Physical Details :-

Material : LM6 Grade or higher grade aluminum
Construction : Pressure diecast enclosure
Fixture Dimensions : OD 155 mm x H 130 mm
Weight : 0.5 Kgs apprx.,
Cut out Diameter : 130 mm
Suitable fixing : Flase ceiling

Applications

: Indoor & Commercial

AAI Curve -

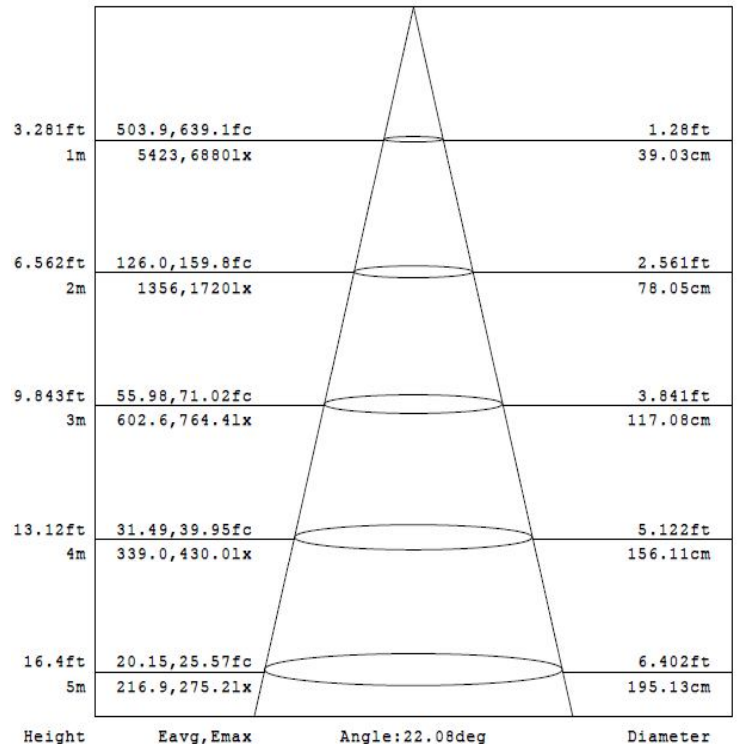

* On all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

