



Product Details :-

Code : TSRW30/8
Model : Track light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 30Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 10%
Driver : Constant current active
Powerfactor corrected
Driver Efficiency : > 85%


Light Data :-

LED Type : COB, LM80 Certified
System efficacy : >80lm/W
Beam angle : 36°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 70
Secondary optics : Polycarbonate lens
LED Life time : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP20

Light distribution :

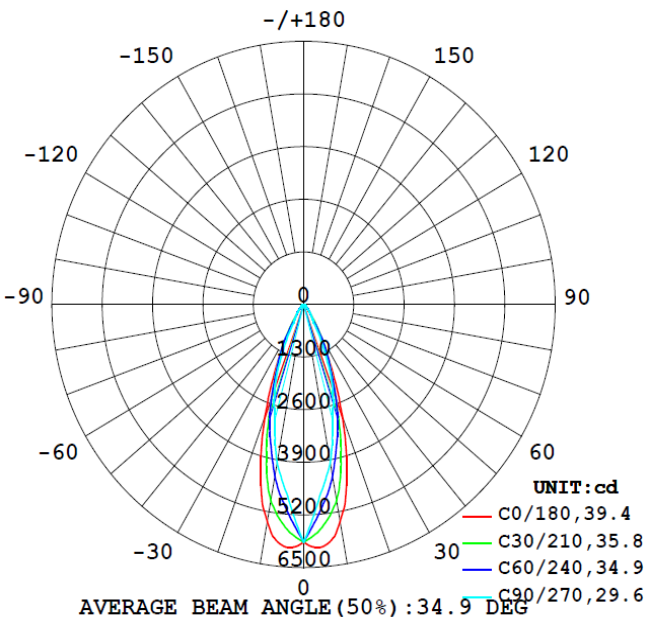

Physical Details :-

Material : LM6 Grade aluminum or higher grade
Construction : Pressure die cast aluminum enclosure
Fixture Dimensions : L 180mm x W 80mm x H 210mm
Suitable mounting : Surface track mount


Protections :-

Output Over voltage / Under voltage protected : Provided
Output Over current and Short circuit : Provided

Applications

: Indoor, Outdoor & Commercial

AAI Curve :

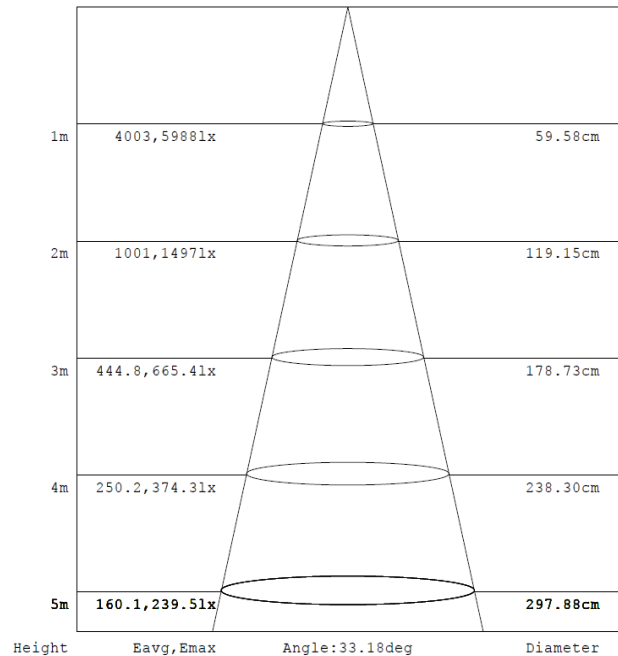

* On all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

