



**Product Details :-**

Code : HLD18110  
Model : COB light - HLD series

**Electrical Data :-**

Working voltage range : 100 - 277VAC  
Input voltage : 220 - 240VAC  
Power : 10 Watt  
Power factor : >0.9  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver efficiency : > 85%



**Light Data :-**

LED Type : COB, LM80 Certified  
System efficacy : >80lm/W  
Beam angle : 36 Deg  
CCT range : 2700 - 6500K, Multi CCT  
CRI(Ra) : Typical 80  
Reflector : Polycarbonate reflector  
LED Life time : 50,000 hours

**Environmental :-**

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10 °C to + 85 °C  
IP rating : IP20

**Light distribution:-**

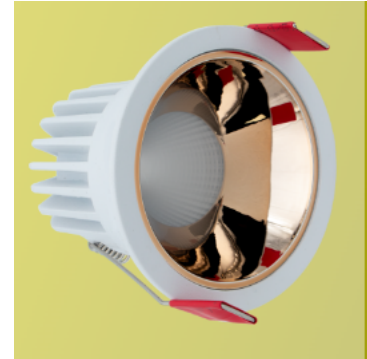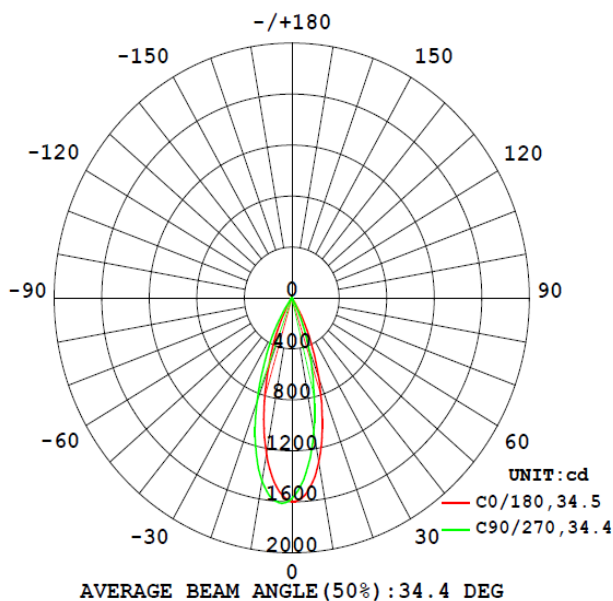


**Physical Details :-**

Material & Construction : Pressure die cast aluminum  
Fixture dimensions : Dia 84mm x H 75mm  
Cut out dimensions : Dia 74mm  
Weight : 0.25 Kgs  
Suitable fixing : False ceiling

**Applications**

**: Indoor & Commercial lighting**

**AAI Curve:-**

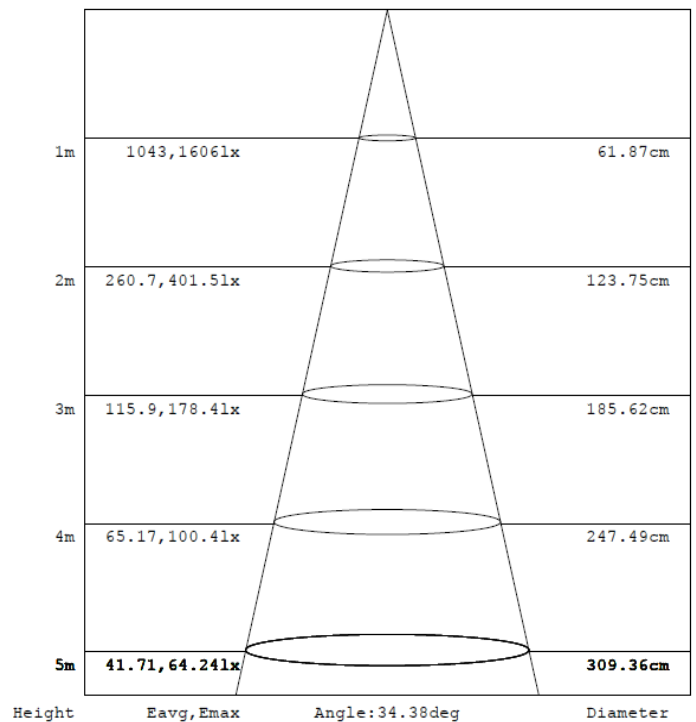

\* On all electrical parameters (+/-10%) tolerance to be considered  
\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice