




Product Details :-

Code : HLD18218
Model : COB light - HLD series

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 18 Watt
Power factor : >0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%

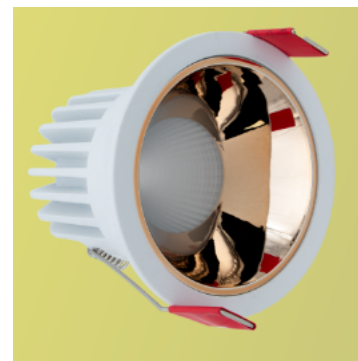

Light Data :-

LED Type : COB, LM80 Certified
System efficacy : >80lm/W
Beam angle : 36 Deg
CCT range : 2700 - 6500K, Multi CCT
CRI(Ra) : Typical 80
Reflector : Polycarbonate reflector
LED Life time : 50,000 hours

Physical Details :-

Material & Construction : Pressure die cast aluminum
Fixture dimensions : Dia 105mm x H 89mm
Cut out dimensions : Dia 93mm
Weight : 0.35 Kgs
Suitable fixing : False ceiling


Applications

: Indoor & Commercial lighting


Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP20

Light distribution:-

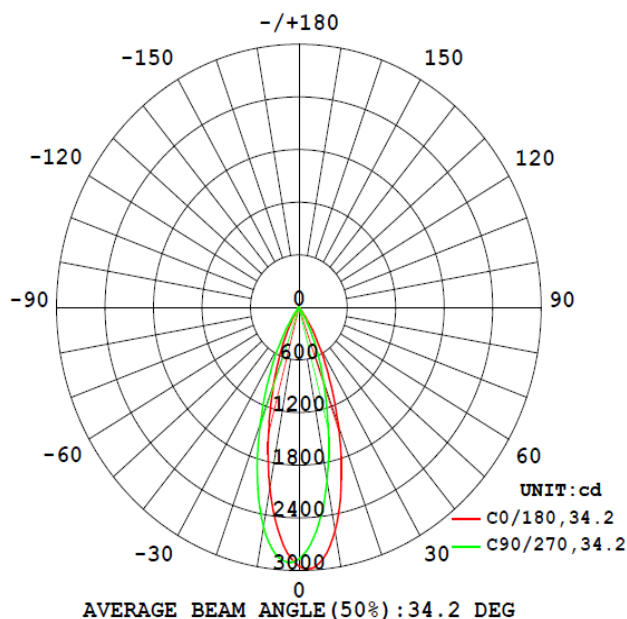

AAI Curve:-

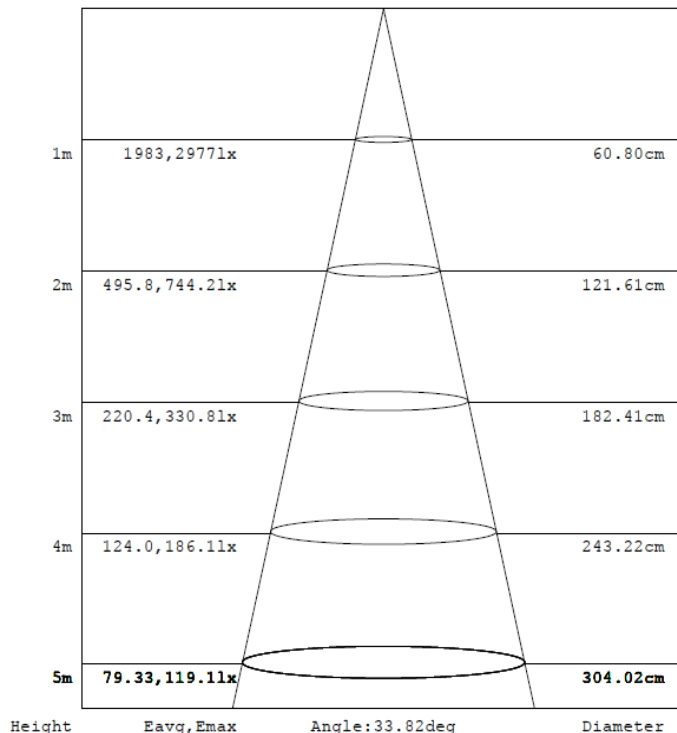

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice