



Product Details :-

Code : LSQ510
Model : Spot Light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input volatge : 220 - 240VAC
Power : 10 Watt
Frequency : 50Hz
THD : < 15%
Driver : Constant current


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >70lm/W
Beam angle : 36°
CCT range : 2700 - 6500K
CRI(Ra) : Typical 70
Reflector : PC reflector
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP 20

Light distribution :-

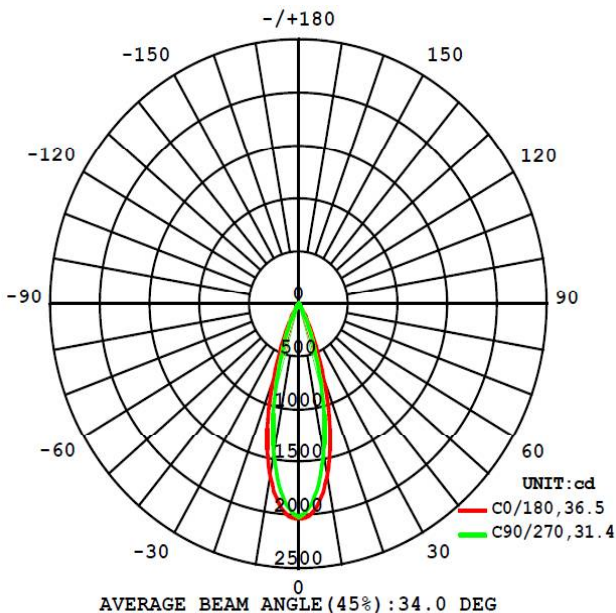

Physical Details :-

Material & Construction : Pressure die cast aluminum
Fixture Dimensions : L 147mm x W 45mm x H 50mm
Weight : 260grm approx.,
Cut out : L 137mm x W 35mm
Type of mounting : False ceiling

Applications : Indoor & Commercial lighting



* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice