



**Product Details :-**

Code : FLJJ100  
Model : DOB Flood light

**Electrical Data :-**

Working voltage range : 140 - 277 VAC  
Input voltage : 220 - 240 VAC  
Power : 100 Watt

**Light Data :-**

LED Type : SMD LED, LM80 Certified  
System efficacy : >100lm/W  
Beam angle : 80°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 80  
Secondary optics : Polycarbonate lens  
LED Life time : 50,000 hours

**Environmental :-**

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10°C to + 85 °C  
IP rating : IP65



**Physical Details :-**

Material and Construction : Pressure die cast aluminum enclosure  
Fixture Dimensions : L 272mm x W 214mm x H 25mm  
Weight : 0.82Kgs approx.,  
Mounting type : Pole/Wall mount / Suspension


**Protections :-**

Surge protection : With stand upto 4KV


**Applications**

**: Indoor, Outdoor & Industrial**

**Light distribution :-**

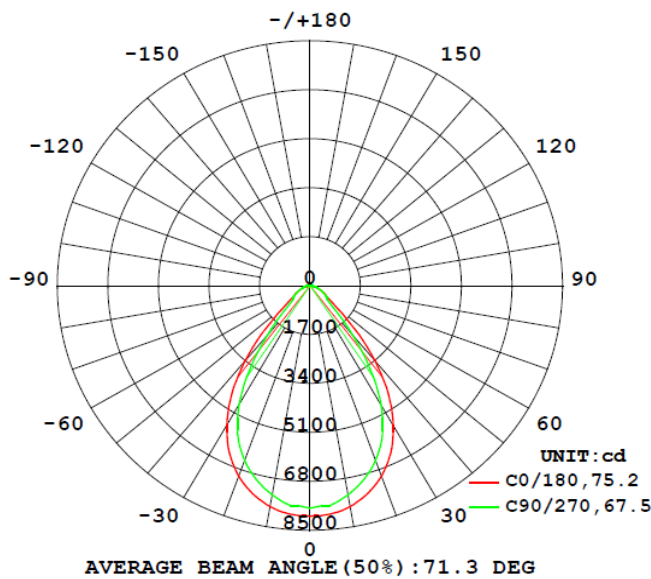

**AAI curve:-**

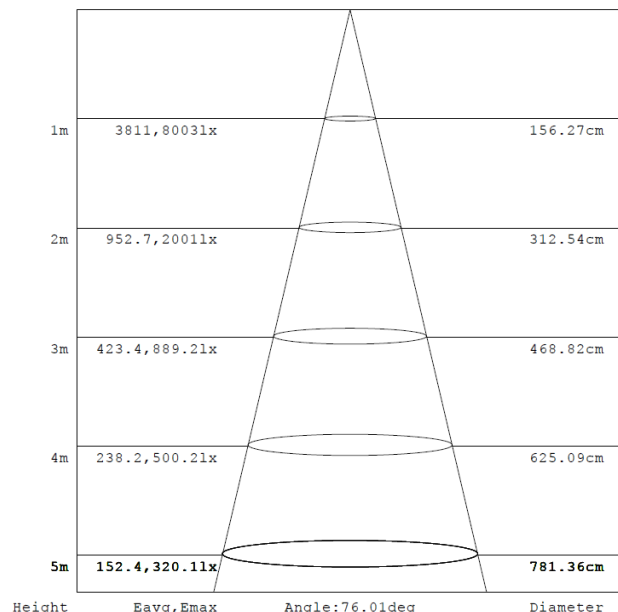

\* On all electrical parameters (+/-10%) tolerance to be considered  
\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

