



Product Details :-

Code : SOBL4CCTRGB
Model : Solar bollard light

Electrical Data :-

Solar Panel : Multi crystalline panel
Battery : Lithium ion battery
Sensor : Ambient light sensor
Remote option : Yes

Light Data :-

LED : SMD LED, LM80 Certified
LED efficacy : >120lm/W
CCT range : Multi CCT + RGB
Life span : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP65

Physical Details :-

Material of housing : PC casing
Casing finish : Black finish
Fixture Dimensions : L 225mm x W 225mm x H 690mm
Type of mounting : Surface mount

Applications : Outdoor & Commercial



Motion Sensor



Lithium Battery




12 Hrs/Day
150 LM/W



ADJUSTABLE
BRIGHTNESS



REMOTE
CONTROL

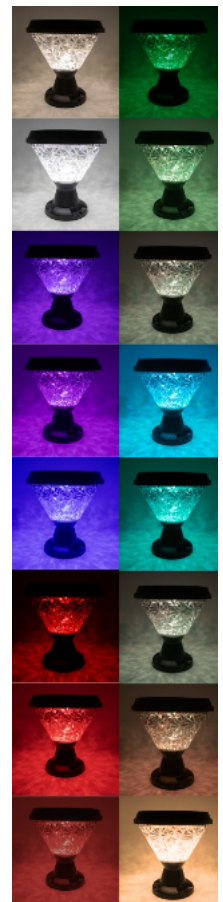

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

* On all electrical parameters (+/-10%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER1.24