



Product Details :-

Code : BLF50
Model : Outdoor bollard light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 50 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current
Driver Efficiency : > 85%

Light Data :-

LED Type : SMD LED, LM80 Certified
CCT range : 2700-6500K
Diffuser : Polycarbonate diffuser
LED lifetime : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP65


Physical Details :-

Material & Construction : Aluminum die cast enclosure & MS pipe
Fixture Dimensions : 3mtr height
Suitable fixing : Floor mount

Protections :-

Output Over voltage / Under voltage protected : Complied
Output Over current and Short circuit : Complied
Surge protection : Inbuilt surge 4KV & External 10KV

**Applications : Walkways, parking lots,
boardwalks, pathways, and building entrances**

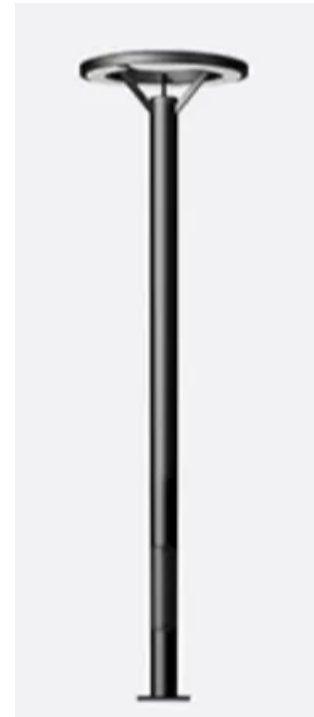

* On all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER1.23