



**Product Details :-**

Code : LST90J5  
Model : Street light

**Electrical Data :-**

Working voltage range : 100 - 277 VAC  
Input voltage : 220 - 240 VAC  
Power : 90W  
Power factor : >0.95  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver registration No. : BIS-IS15885-2-13:2012,  
R-63000353  
& IS 16104 : 2012  
Driver Efficiency : > 85%


**Light Data :-**

LED : SMD LED, LM80 Certified  
System efficacy : >120lm/W  
Beam angle : Batwing distribution  
CCT range : 2700 - 6500K  
CRI (Ra) : Typical 80  
Secondary Optics : Polycarbonate LENS cover  
Life span : 50,000 hours

**Environmental :-**

Working temperature : 0Deg C to +55Deg C  
Working humidity : 10 to 90% RH  
Storage temperature : -10Deg C to +55Deg C  
IP rating : IP66

**Light distribution :-**

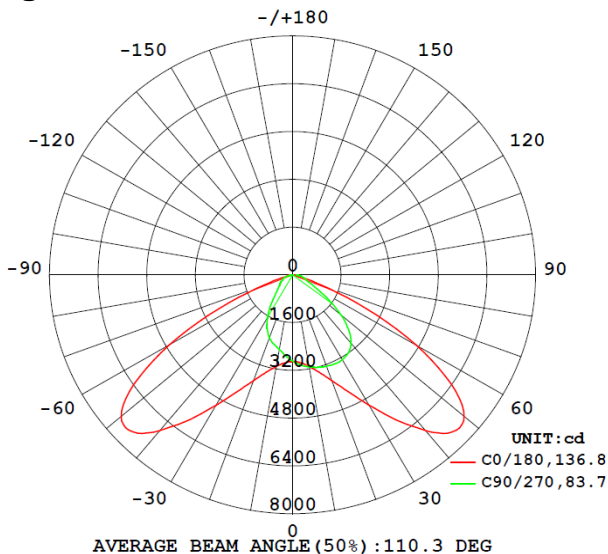

**0**  
Maintenance

**50%**  
ENERGY  
SAVING

**ZERO**  
Mercury

**Physical Details :-**

Material & Construction : Pressure die cast aluminum enclosure  
Product finish : Powder coated  
Fixture Dimensions : L 562mm x W 180mm x H 55mm  
Type of mounting : Pole mount  
Suitable pole dia : 50 - 55mm dia

**Protections :-**

Output Over voltage /  
Under voltage protected : Provided  
Output Over current and  
Short circuit : Provided  
Surge protection : Inbuilt driver 4KV,  
External 10KV

**Applications : Outdoor & Street lighting**

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

