



Product Details :-

Code : X35
Range : X - Range
Model : Down light

Electrical Data :-

Input voltage : 220-240 VAC
Power : 5 Watt
Power factor : 0.9
Frequency : 50 Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >50 lm/W
Beam angle : 120°
CCT range : 2700 - 6500K
CRI(Ra) : Typical 80
Diffuser : Polycarbonate
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : 0°C to + 85 °C
IP rating : IP20

Light Distribution:

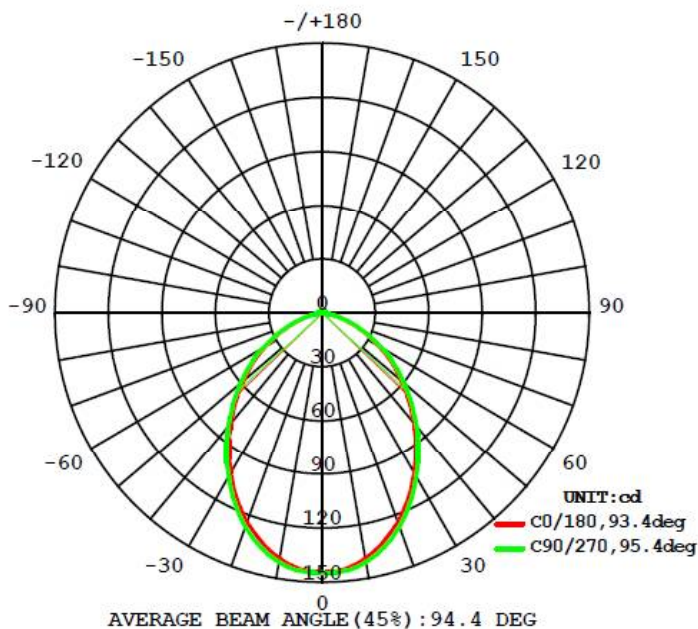

Physical Details :-

Material : LM6 grade aluminum or higher grade
Product finish : Powder coated
Construction : Pressure die cast aluminum enclosure
Fixture Dimensions : Dia 82mm x H 53mm
Fixture cut-out diameter : Dia 58mm
Suitable fixing : False ceiling

Applications

: Indoor & commercial

