



Product Details :-

Code : LGE20
Model : Garden/Spike light

Electrical Data :-

Working voltage range : 100 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 20Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver Efficiency : > 85%


Light Data :-

LED Type : COB, LM80 certified
System efficacy : >75lm/W
Beam angle : 36 Deg
CCT range : 2700 - 6500K
CRI(Ra) : Typical 80
Reflector : Polycarbonate reflector
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP65

Light distribution :-

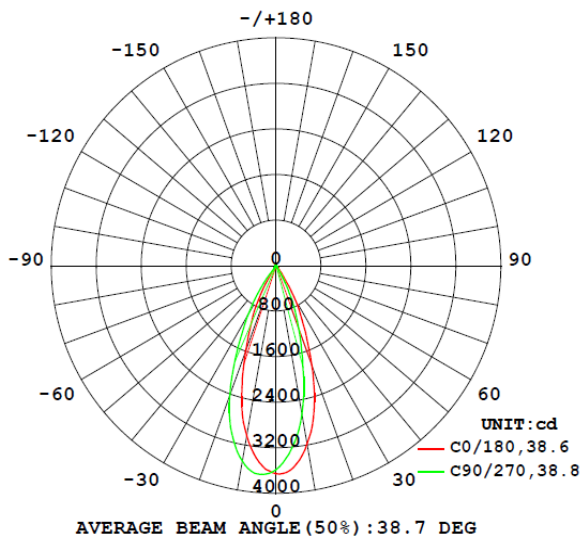

0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material : LM6 Grade aluminum or higher grade
Construction : Pressure die cast aluminum enclosure
Fixture Dimensions : 78mm Dia x 118mm H
Mounting : On ground

Applications : Outdoor & commercial

* On all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

