



FortuneArtrt LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,

Gundlapochampally, Hyderabad - 500014

Web : www.fortunearttrt.com

Product Technical Specification

FA-F/DD-PS 2125

Product Details :-

Code : LPB440
Model : PC Batten light

Electrical Data :-

Working voltage range : 100 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 40Watt
Power factor : >0.95
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver Efficiency : > 85%
Driver registration No : BIS-IS15885-2-13:2012
R-63000353
& IS 16104:2012


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >100lm/W
Beam angle : Lambertian distribution
CCT range : 2700 - 6500K
CRI : Typical 80
Diffuser material : Polycarbonate diffuser
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0 °C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP65

Light distribution :-

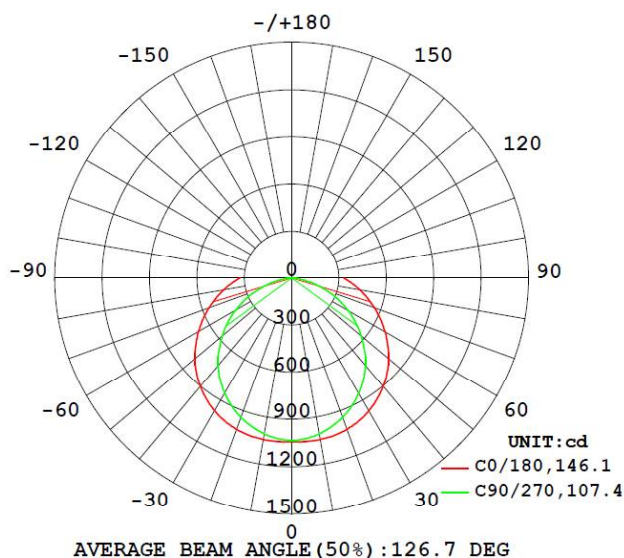

0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material & Construction : PC extrusion
Fixture Dimensions : L 1200mm x W 68mm x H 48mm
Suitable fixing : Suspension / Ceiling mount

Applications

: Indoor & Commercial

- * On all electrical parameters (+/-10%) tolerance to be considered
- * On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



VER1.25