FortuneArrt LED Lighting Pvt Ltd.,
WQ : Survey no:509/1/2, Apparel Export park,
Gundlapochampally, Hyderabad - 500014
Web : www.fortunearrt.com

Product Technical specification

FA-F/DD-PS 1695

Product Details :-

Code	: HLD90525
Model	: Pull out Cob light

0 Maintenance

50% ENERGY SAVING

ZERO Mercury

Electrical Data :-

Working voltage range	: 100 - 277VAC
Input voltage	: 220 - 240VAC
Power	: 25 Watt
Power factor	: > 0.9
Frequency	: 50Hz
THD	: < 15%
Driver	: Constant current
Driver efficiency	: > 85%

Light Data :-

LED Type	: COB LED, LM80 Certified
System efficacy	: >90 Lm/W
Beam angle	: 42°
CCT range	: 2700 - 6500K
CRI (Ra)	: Typical 80
Reflector	: Polycarbonate reflector
Diffuser	: Polycarbonate diffuser
LED Life time	: 50,000 hours

Physical Details :-

Material & Construction	: Pressure die cast aluminum enclosure
Fixture Dimensions	: L 218mm x W 50mm x H 88mm
Ceiling cut out	: L 213mm x W 43mm
Suitable fixing	: Recess mount

Applications : Indoor & Commercial

Environmental :-

Working temperature	: 0°C to + 55 °C
Working humidity	: 10 to 90% RH
Storage temperature	: 0°C to + 85 °C
IP rating	: IP20

Light distribution:-

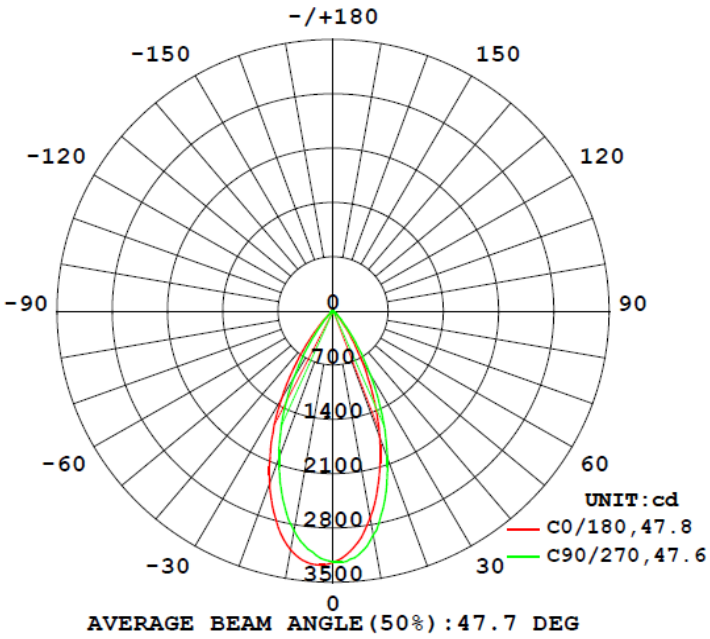

*** On all mechanical dimensions & weight (+/-5%) tolerance to be considered**
*** On all electrical parameters (+/-10%) tolerance to be considered**

Note : The above specification are subjected to change without prior notice

VER2.26