



Product Details :-

Code : HLDRS70315
Model : COB light - HLD series

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 15 Watt
Power factor : >0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Type : COB, LM80 Certified
System efficacy : >80 Lm/W
Beam angle : 42 Deg
CCT range : 2700 - 6500K
CRI(Ra) : Typical 80
Secondary optics : Polycarbonate lens
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP20

Light distribution:-

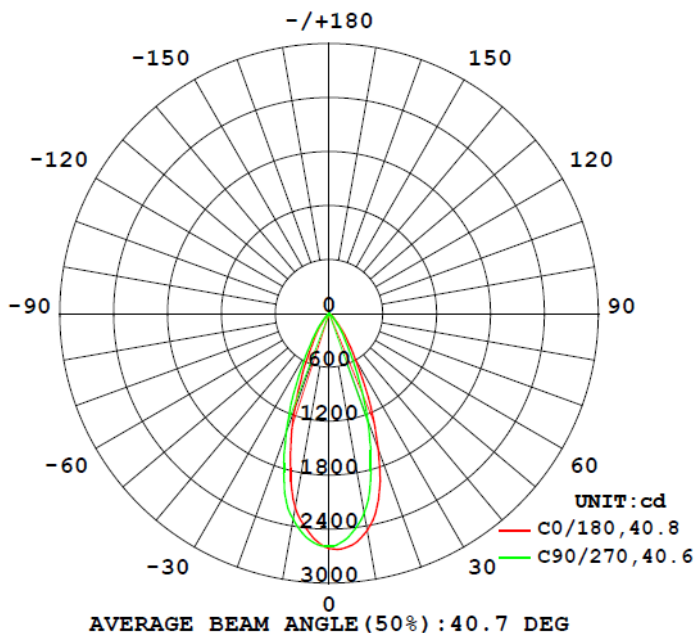

Physical Details :-

Material & Construction : Pressure die cast aluminum
Product finish : White color
Fixture dimensions : L 85mm x W 85mm x H 68mm
Cut out dimensions : Dia 72mm
Suitable fixing : False ceiling

Applications : Indoor & Commercial lighting

Note : The above specification are subjected to change without prior notice

* On all electrical parameters (+/-10%) tolerance to be considered
On all mechanical dimensions & weight (+/-5%) tolerance to be considered

