



## FortuneArtr LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,

Gundlapochampally, Hyderabad - 500014

Web : [www.fortunearttr.com](http://www.fortunearttr.com)

## Product Technical specification

FA-F/DD-PS 1679

### Product Details :-

Code : HLSQL14  
Model : COB - HLD Series

### Electrical Data :-

Working voltage range : 100 - 277VAC  
Input voltage : 220 - 240VAC  
Power : 4 Watt  
Power factor : > 0.9  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver efficiency : > 85%


### Light Data :-

LED Type : SMD LED, LM80 Certified  
System efficacy : >80 Lm/W  
Beam angle : 18°  
CCT range : 2700 - 6500K  
CRI : Typical 70  
Lens : Polycarbonate lens  
LED Life time : 50,000 hours

### Environmental :-

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10°C to + 85 °C  
IP rating : IP20

### Light Distribution :-

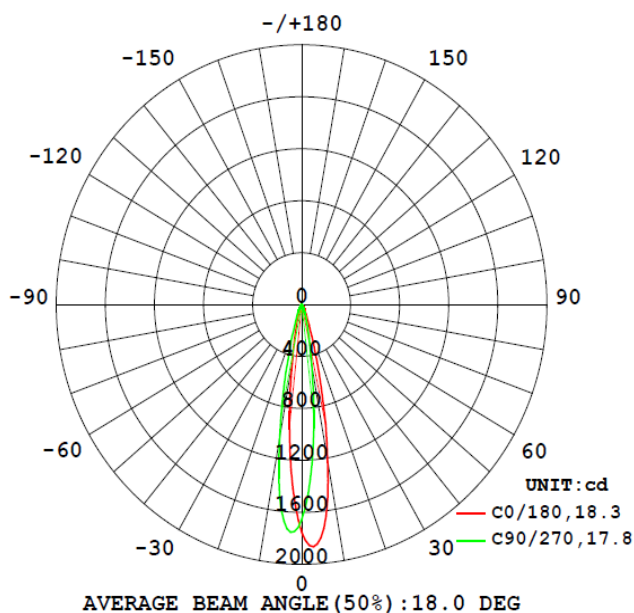

0  
Maintenance

50%  
ENERGY  
SAVING

ZERO  
Mercury

### Physical Details :-

Material : LM6 grade aluminum or higher grade  
Construction & finish : Pressure diecast enclosure & powder coated  
Fixture Dimensions : L 54mm x W 54mm x H 52mm  
Cut out : L 44mm x W 44mm  
Suitable fixing : Flase ceiling

### Applications

: Indoor & Commercial

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER3.26