



**Product Details :-**

Code : XC25  
Model : Cob light

**Electrical Data :-**

Working voltage range : 100 - 277VAC  
Input voltage : 220 - 240VAC  
Power : 5 Watt  
Power factor : > 0.9  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active  
Powerfactor corrected  
Driver efficiency : > 85%


**Light Data :-**

LED Type : COB LED, LM80 Certified  
System efficacy : >60lm/W  
Beam angle : 60°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 70  
Reflector : Polycarbonate reflector  
LED Life time : 50,000 hours

**Environmental :-**

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10 °C to + 85 °C  
IP rating : IP20

**Light Distribution :-**

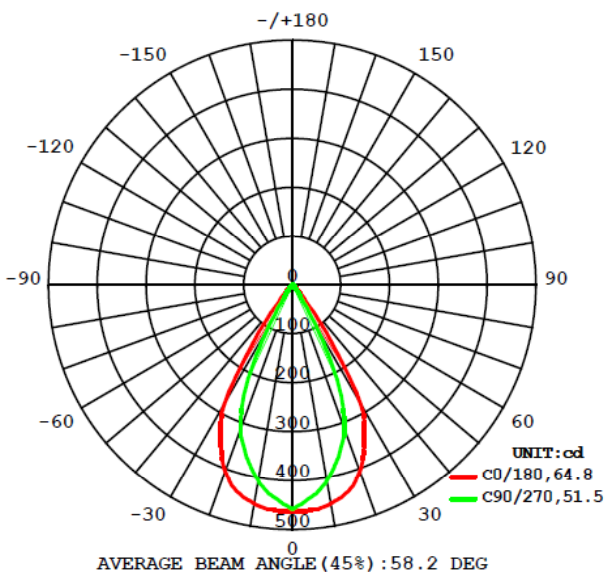

**0**  
Maintenance

**50%**  
ENERGY  
SAVING

**ZERO**  
Mercury

**Physical Details :-**

Material : Pressure die cast aluminum casing  
Fixture Dimensions : Dia 82mm x H 53mm  
Cut out Diameter : Dia 60 mm  
Suitable fixing : Flase ceiling

**Applications : Indoor & Commercial**



\* On all electrical parameters (+/-10%) tolerance to be considered  
\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice