



FortuneArrrt LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,
Gundlapochampally, Hyderabad - 500014
Web : www.fortunearrt.com

Product Technical specification

FA-F/DD-PS 1566

Product Details :-

Code : YC215
Model : Cob light

Electrical Data :-

Working voltage range : 100 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 15 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Type : COB LED, LM80 Certified
System efficacy : >80lm/W
Beam angle : 100°
CCT range : 2700 - 6500K
CRI(Ra) : Typical 70
Reflector : Polycarbonate reflector
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP20

Light Distribution :-

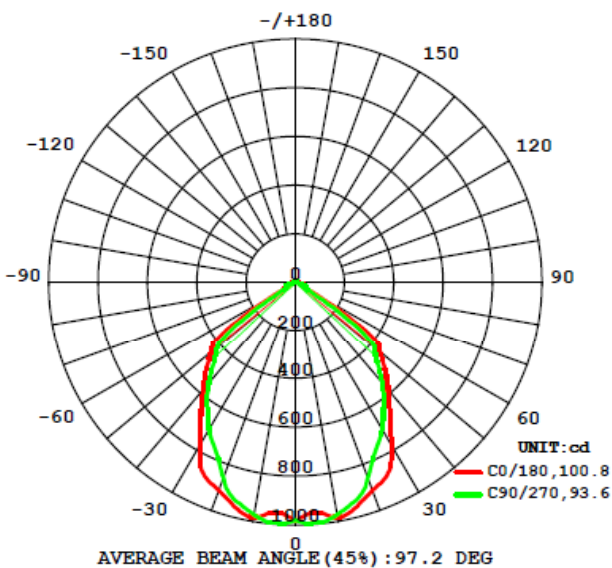

0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material & Construction : Pressure die cast aluminum casing
Fixture Dimensions : L 135mm x W 135mm x H 52mm
Cut out Diameter : L 110mm x W 110mm
Suitable fixing : Flase ceiling

Applications

: Indoor & Commercial

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



VER5.24