



### Product Details :-

Code : DL0236  
Model : Down light

### Electrical Data :-

Input voltage range : 120 - 265VAC  
Input voltage : 220 - 240VAC  
Power : 36 Watt  
Frequency : 50Hz  
Driver : Constant current


### Light Data :-

LED Type : SMD LED, LM80 Certified  
System efficacy : >100 Lm/W  
Beam angle : 120°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 70  
Diffuser : Polycarbonate diffuser  
LED Life time : 50,000 hours

### Environmental :-

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10°C to + 85 °C  
IP rating : IP20

### Light Distribution :-

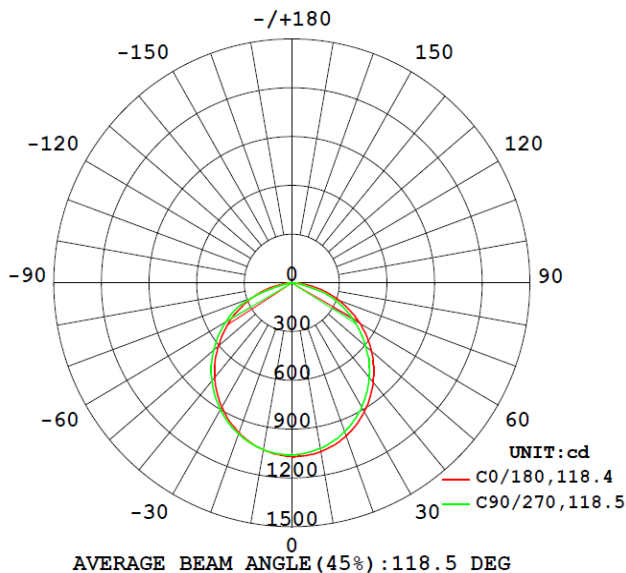

### Physical Details :-

Material : LM6 grade aluminum or higher grade  
Product finish : Powder coated  
Construction : Pressure die cast aluminum enclosure  
Fixture Dimensions : L 177mm x W 177mm x H 67mm  
Fixture cut-out diameter : Dia 153mm  
Suitable fixing : False ceiling

### Applications

: Indoor & Commercial



\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

