



Product Details :-

Code : DL10DB / W
Model : PC DOB Down light - Dual color

Electrical Data :-

Working voltage range : 10 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 10 Watt

Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >70 Lm/W
Beam angle : 120°
CCT range : 6500K (+10%) & Blue color lip edge
CRI (Ra) : Typical 80
Diffuser : Polycarbonate diffuser
LED Life time : 50,000 hours

Environmental :-


Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP20

Physical Details :-

Material & construction : Polycarbonate casing
Fixture Dimensions : Dia 115mm x H 32mm
Fixture cut-out diameter : Dia 100mm
Suitable fixing : False ceiling

Applications : Indoor & commercial

Light Distribution :-

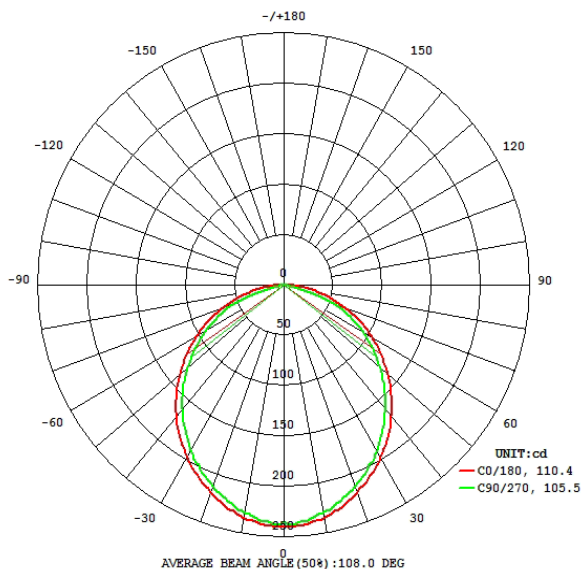


0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury



By continuous switch ON/OFF
to change different mode

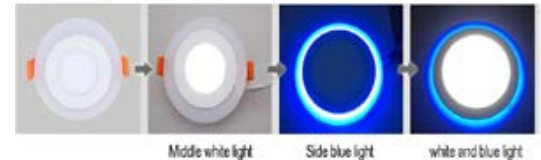

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER1.25