



FortuneArtr LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,
Gundlapochampally, Hyderabad - 500014
Web : www.fortunearttr.com

Product Technical Specification

FA-F/DD-PS 1401

Product Details :-

Code : FCR50
Model : Facade

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 50 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
powerfactor corrected
Driver registration No. : BIS-IS15885-2-13:2012,
R-63000353
& IS 16104:2012
Driver Efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM 80 certified
System efficacy : >70lm/W
Beam angle : 15, 24 & 36Deg
(Other beam options on request)
CCT range : 2700 - 6500K
CRI (Ra) : Typical 70
Glass : Toughened glass
Secondary optics : Polycarbonate LENS
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP65

Light distribution:-

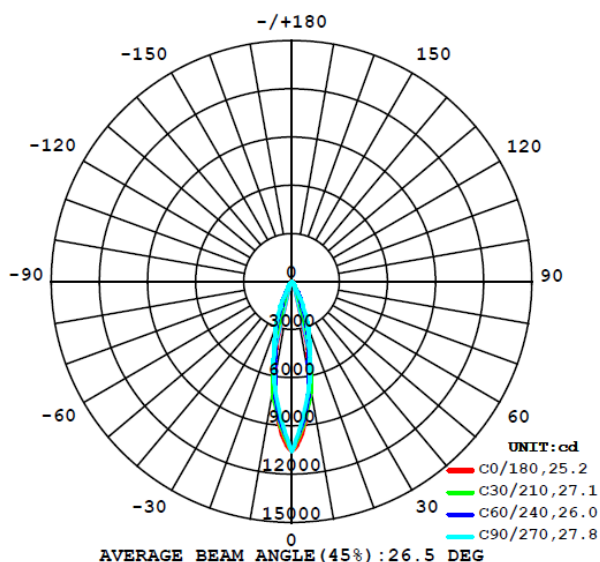

0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material : LM6 grade aluminum or higher grade
Construction : Pressure die cast with powder coated
& Potted
Fixture Dimensions : Dia 290mm x H 235mm
Suitable fixing : Surface mount with clamp

Protections :-

Output Over voltage /
Under voltage protected : Provided
Output Over current and
Short circuit : Provided
Surge protection : Inbuilt driver 4KV,
External 10KV

Applications : Outdoor & Commercial



VER3.24

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice