



Product Details :-

Code : FLJJ250
Model : DOB Flood light

Electrical Data :-

Working voltage range : 140 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 250 Watt

Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >100lm/W
Beam angle : 80°
CCT range : 2700 - 6500K
CRI(Ra) : Typical 80
Secondary optics : Polycarbonate lens
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP65

Physical Details :-

Material and Construction : Pressure die cast aluminum enclosure
Fixture Dimensions : L 426mm x W 316mm x H 25mm
Weight : 2.1 Kgs approx.,
Mounting type : Pole/Wall mount / Suspension



0
Maintenance

50%
ENERGY
SAVING


ZERO
Mercury

Protections :-

Surge protection : With stand upto 4KV

Applications : Indoor, Outdoor & Industrial

Light distribution :-

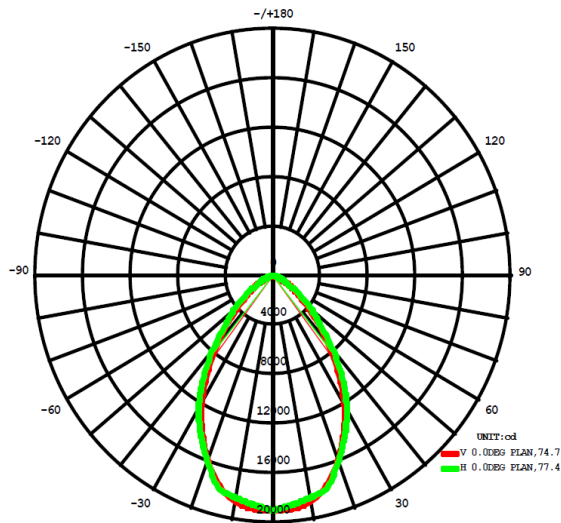

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER1.25