



Product Details :-

Code : LCH10R/8
Model : Haging Cob light

Electrical Data :-

Working voltage range : 100 - 277 VAC
Input voltage : 220 - 240 VAC
Power : 10Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver Efficiency : > 85%


Light Data :-

LED Type : COB, LM80 Certified
System efficacy : >80Lm/W
Beam angle : 36°
CCT range : 2700-6500K
CRI(Ra) : Typical 70
Secondary optics : Polycarbonate LENS
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP20

Light distribution :

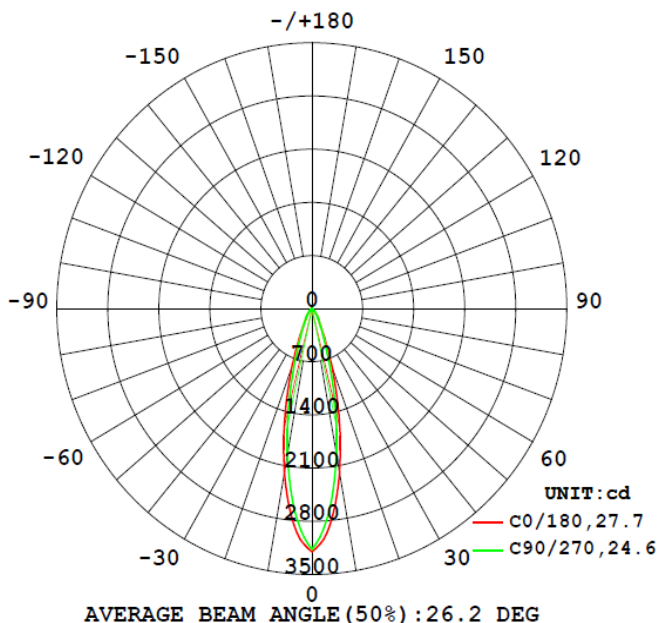

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material : Extruded aluminum enclosure
Product finish : Black powder coated
Fixture Dimensions : Dia 50mm x H 125mm
Suitable mounting : Suspencion/Hanging

Applications : Indoor,Outdoor & Commercial lighting

