



Product Details :-

Code : PMS1118
Model : False ceiling Panel light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 18 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Power factor corrected
Driver registration No. : BIS-IS15885-2-13:2012,
R-63000353
& IS 16104 : 2012
Driver Efficiency : > 85%



Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >80 Lm/W
Beam angle : 120°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 80
Diffuser : Polycarbonate diffuser
LED Life Span : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP54

Light distribution :-

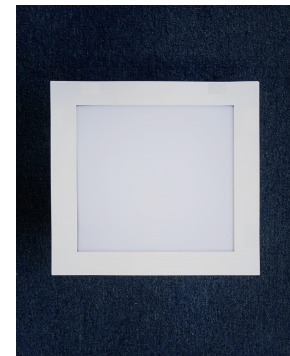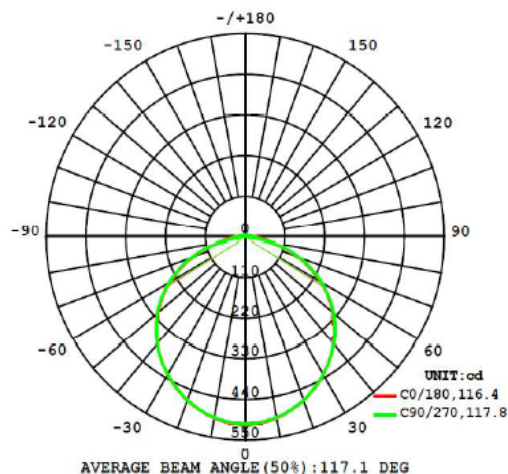

Customized dimensions can supply on request

Physical Details :-

Material & construction : CRCA enclosure
Fixture dimensions : L 300mm x W 300mm x H 50mm
cut out : L 290mm x W 290mm
Mounting type : False ceiling

Protections :-

Output Over voltage /
protected : Complied
Output Over current and
Short circuit : Complied
Surge protection : Inbuilt driver 3KV,
External 5KV

Applications

: Indoor & Commercial

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice