



Product Details :-

Code : PMS1125SC
Model : Surface panel light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 25 Watt
Power factor : > 0.95
Frequency : 50Hz
THD : < 15%
Driver : Constant current
Power factor corrected

Driver registration No : BIS-IS15885-2-13:2012
R-63000353
IS 16104:2012

Driver Efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >80Lm/W
Beam angle : 120°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 80
Diffuser : Polycarbonate diffuser
LED Life Span : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP54

Light Distribution :-

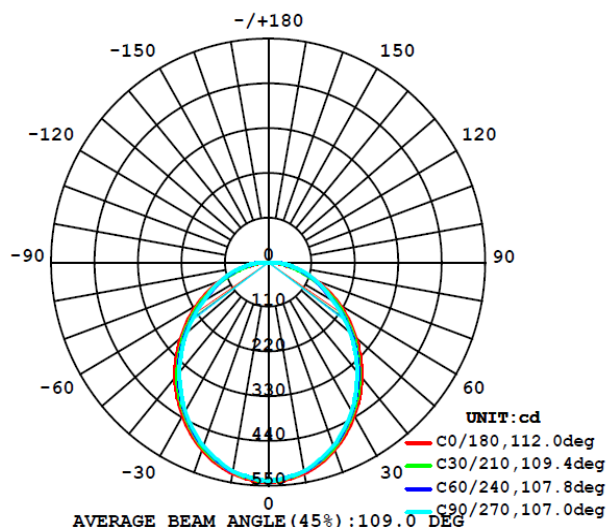

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material & Construction : CRCA enclosure
Fixture Dimensions : L 300mm x W 300mm x H 55mm
Mounting type : Surface mount

Protections :-

Output Over voltage /
protected : Complied
Output Over current and
Short circuit : Complied
Surge protection : Inbuilt surge 2KV,
External 5KV

Applications

: Indoor, Outdoor & Commercial

