



**Product Details :-**

Code : UFO150  
Series : UFO - Die cast

**Electrical Data :-**

Working voltage range : 100 - 277 VAC  
Input voltage : 220 - 240 VAC  
Power : 150 Watt  
Power factor : > 0.95  
Frequency : 50Hz  
THD : < 15%  
Driver : Constant current active

Powerfactor corrected  
Driver registration No : BIS-IS15885-2-13:2012  
R-63000353  
& IS 16104:2012

Driver efficiency : > 85%


**Light Data :-**

LED Type : SMD LED, LM80 Certified  
System efficacy : >100lm/W  
Beam angle : 90°  
CCT range : 2700 - 6500K  
CRI(Ra) : Typical 70  
Secondary Optics : Polycarbonate LENS cover  
LED Life time : 50,000 hours

**Environmental :-**

Working temperature : 0°C to + 55 °C  
Working humidity : 10 to 90% RH  
Storage temperature : -10°C to + 85 °C  
IP rating : IP65


**Light distribution :-**

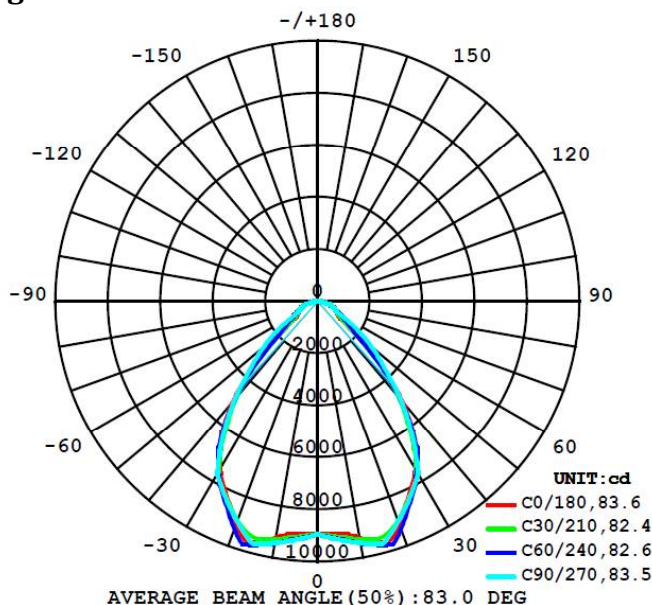

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

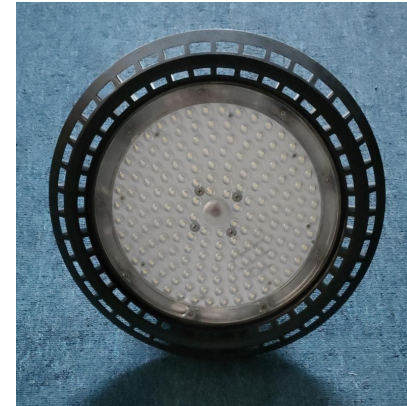

**0**  
Maintenance

**50%**  
ENERGY  
SAVING

**ZERO**  
Mercury

**Physical Details :-**

Construction : Pressure die cast aluminum with powder coated  
Fixture Dimensions : Dia 357mm x H 165mm  
Weight : 3.5 Kgs approx.,  
Suitable fixing : Suspension / Ceiling mount

**Protections :-**

Output Over voltage /  
Under voltage protected : Provided  
Output Over current and  
Short circuit : Provided  
Surge protection : Inbuilt driver 4KV,  
External 10KV

**Applications : Indoor, Outdoor & Industrial**

