



Product Details :-

Code : XDDSP15
Model : Surface dome - Round

Electrical Data :-

Working voltage range : 140 - 277VAC
Input voltage : 220 - 240VAC
Power : 15 Watt

Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >70 Lm/W
Beam angle : 120°
CCT range : 2700 - 6500K
CRI (Ra) : Typical 80
Diffuser : Polycarbonate diffuser
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0 °C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP20



0
Maintenance



ZERO
Mercury


Physical Details :-

Material & Construction : Polycarbonate casing
Fixture Dimensions : Dia 156mm x H 27mm
Suitable fixing : Surface mount

Applications

: Indoor, Outdoor & Commercial

Light distribution :-

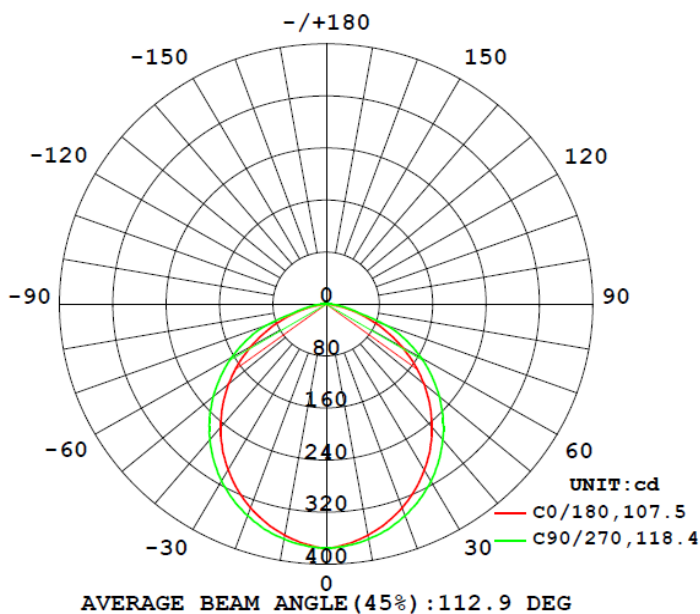

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER1.26