



FortuneArtrt LED Lighting Pvt Ltd.,

WQ : Survey no:509/1/2, Apparel Export park,

Gundlapochampally, Hyderabad - 500014

Web : www.fortunearttrt.com

Product Technical Specification

FA-F/DD-PS 3029

Product Details :-

Code : WWIPA.312

Model : Wall washer

Electrical Data :-

Workig voltage range : 100 - 277VAC

Input voltage : 220 - 240VAC

Power : 12 Watt

Power factor : > 0.9

Frequency : 50Hz

THD : < 15%

Driver : Constant current active
Powerfactor corrected

Driver Efficiency : > 85%

Light Data :-

LED details : SMD LED, LM80 certified

System efficacy : >60 Lm/W

Beam angle : 24, 36Deg (Other beam options
on request)

Secondary Optics / LENS : Polycarbonate lens

CCT range : 2700-6500K

CRI(Ra) : Typical 70

LED Life time : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C

Working humidity : 10 to 90% RH

Storage temperature : -10 °C to + 85 °C

IP rating : IP66



0

Maintenance



Physical Details :-

Material : Aluminum

Construction : Extruded aluminum enclosure


Fixture dimensions : L 300mm x W 50mm x H 55mm

Mounting type : Surface mount

Applications

: Outdoor & Commercial lighting

Light distribution:-

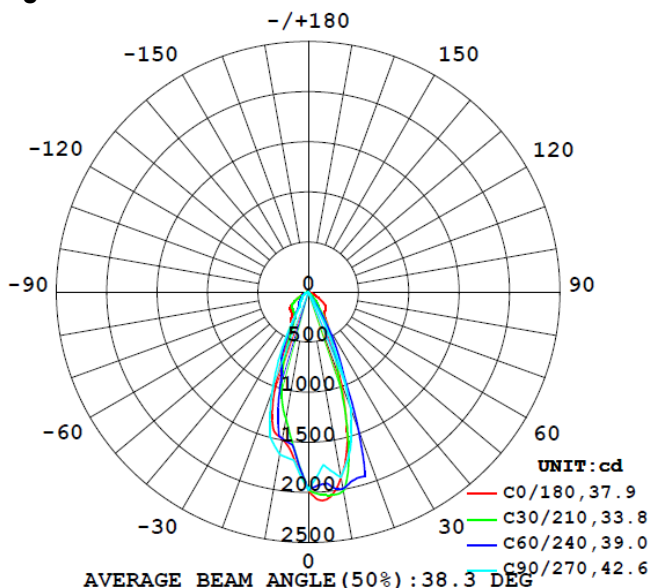

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice



VER 1.26