



LM 79
LM 80



Product Details :-

Code : X620 W
Model : 20WATT LED DOWNLIGHT

Electrical Data :-

Input voltage range : 140 - 265 VAC
Power : 20 Watt
Power factor : 0.9
Frequency : 50/60 Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver Efficiency : > 85%


Light Data :-

LED Make : NICHIA / Everlite
LED Type : SMD LED
LED Efficacy : 120 lm/Watt
Beam angle : 120°
CCT : 2700 - 6500K
CRI : Typical80
LED Life time : 50,000 hours

Environmental :-

Working temperature : -10 °C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : 0°C to + 85 °C
IP rating : IP20
Hg 0% (Mercury) : Yes

Light Distribution :

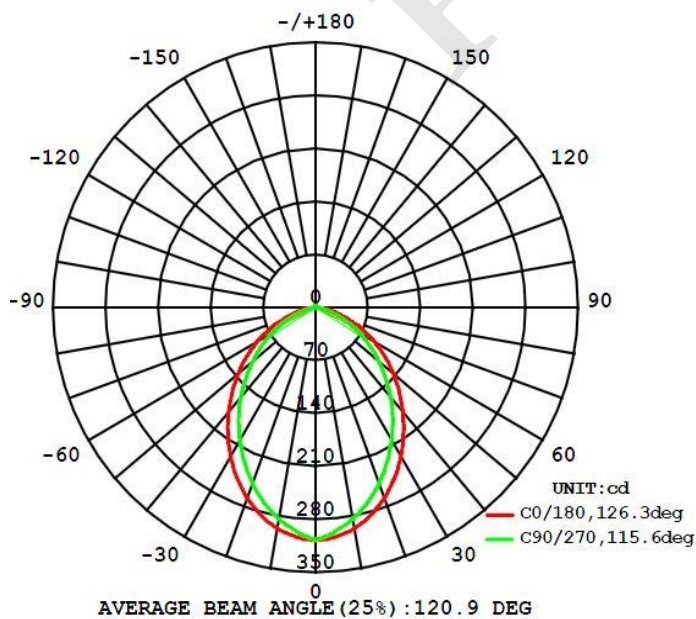

Special features (Optional)

- * Dimmable - Individual / group
- * RF Control

Physical Details :-


Material : LM6 Grade
Product finish : Powder coated
Construction : Pressure die cast aluminum enclosure
Fixture Dimensions : Dia 190mm X H 70mm
Weight : 0.45 Kg Apprx
Suitable fixing : False Ceiling

Protections :-

- Output Over voltage / Under voltage protected : Provided
- Output Over current and Short circuit : Provided
- Input high voltage cut off : Provided
- Voltage / Power fluctuations : External Protector

Applications : Indoor / Commercial

AAI Curve :

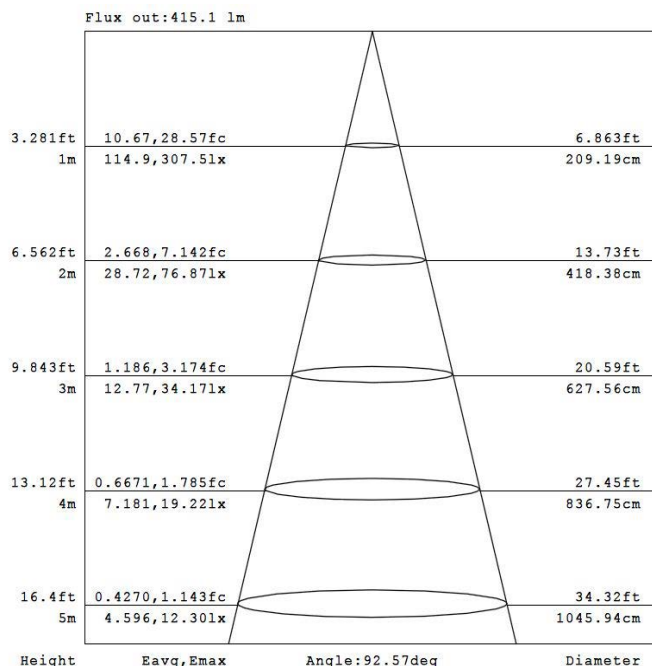

Note : The above specification are subjected to change without prior notice
