



Product Details :-

Code : LFL30
 Series : Sun range
 Model : Flood light

Electrical Data :-

Input voltage range : 100 - 277 VAC
 Power : 30 Watt
 Power factor : 0.95
 Frequency : 50/60 Hz
 THD : < 15%
 Driver : Constant current active
 Powerfactor corrected
 Driver Efficiency : > 85%


Light Data :-

LED Make : NICHIA
 LED Type : COB
 LED Efficacy : 120 lm/Watt
 Beam angle : 120 °
 CCT : W,MW,WW,R,G,B,RGB
 CRI : Typical 70
 LED Life time : 50,000 hours

Environmental :-

Working temperature : -10 °C to + 55 °C
 Working humidity : 10 to 90% RH
 Storage temperature : 0°C to + 85 °C
 IP rating : IP65
 Hg 0% (Mercury) : Yes

Light distribution :-

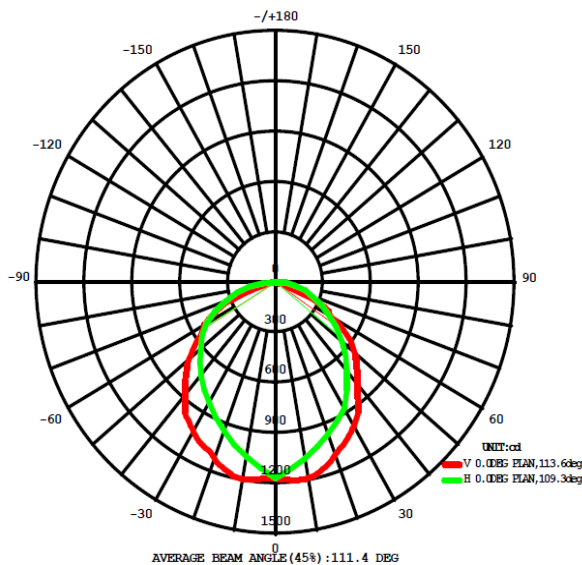

LM 79
LM 80



Special features (Optional)

- * Dimmable - Individual / group
- * RF Control

Physical Details :-

Material : LM6 grade aluminum or higher grade
 Product finish : Powder coated and water proof
 Construction : Pressure die cast aluminum enclosure
 Fixture Dimensions : L 225mm x W 185mm x H 100mm
 Weight : 1.0 kgs approx.,
 Mounting type : Wall mount

Protections :-

- Output Over voltage / Under voltage protected : Provided
- Output Over current and Short circuit : Provided
- Input high voltage cut off : Provided
- Voltage / Power fluctuations : External protector

Applications : Outdoor / Commercial

Note : The above specification are subjected to change without prior notice