

Product Details :-

Code : PMS1235
 Model : False ceiling
 Series : CRCA Panel lights

Electrical Data :-

Working voltage range : 100 - 277VAC
 Input voltage : 220 - 240VAC
 Power : 35 Watt
 Power factor : > 0.9
 Frequency : 50 Hz
 THD : < 15%
 Driver : Constant current active
 Power factor corrected
 Driver registration No. : BIS-IS15885-2-13:2012;
 R 63000353
 & IS - 16104:2012
 Driver Efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM80 Certified
 System efficacy : >90lm/W
 Beam angle : 120°
 CCT range : 2700 - 6500K
 CRI (Ra) : Typical 80
 Diffuser : Polycarbonate diffuser
 LED Life span : 50,000 burning hours

Environmental :-

Working temperature : 0°C to + 55 °C
 Working humidity : 10 to 90% RH
 Storage temperature : -10 °C to + 85 °C
 IP rating : IP54

Light distribution:-

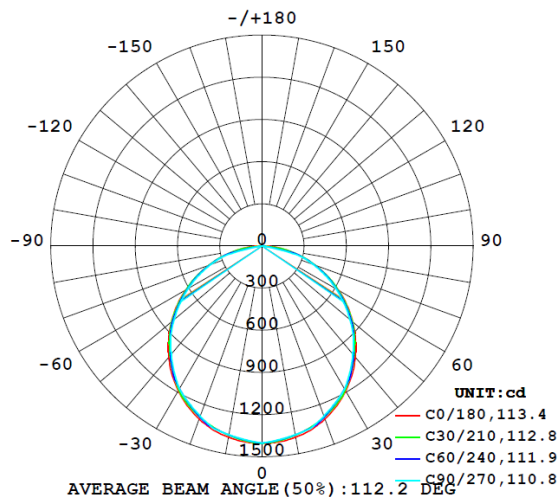

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

0
Maintenance

50%
ENERGY SAVING

ZERO
Mercury



Customized dimensions can supply on request

Physical Details :-

Material : CRCA enclosure
 Fixture dimensions : L 600mm x W 310mm x H 50mm
 Cut out : L 572mm x W 290mm
 Mounting type : False ceiling with clips

Protections :-

Output Over voltage /
 protected : Complied
 Output Over current and
 Short circuit : Complied
 Surge protection : Inbuilt driver 4KV,
 External 5KV (Optional)

Applications

: Indoor & Commercial