



Product Details :-

Code : LBH0710
Model : Bulk Head

Electrical Data :-

Working voltage range : 100 - 277VAC
Inut voltage : 220 - 240VAC
Power : 10 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current
Driver Efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >75lm/W
Beam angle : Lambertian distribution
CCT range : 2700 - 6500K
CRI (Ra) : Typical 80
Diffuser : Polycarbonate diffuser
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10°C to + 85 °C
IP rating : IP20

Light distribution:-

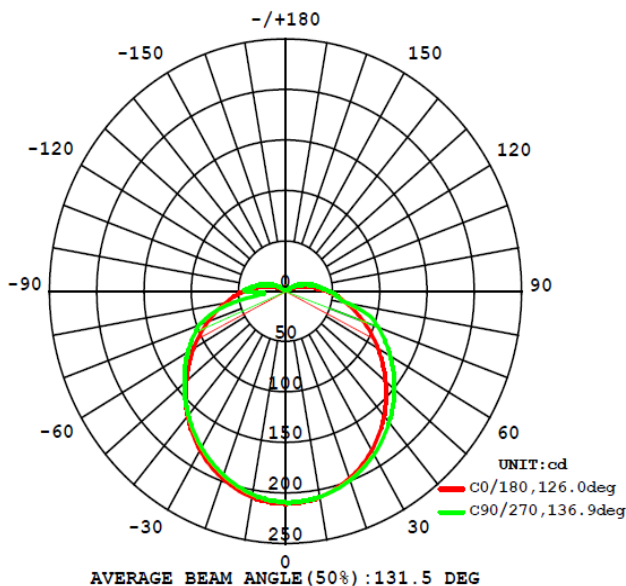

0
Maintenance

50%
ENERGY
SAVING

ZERO
Mercury

Physical Details :-

Material : Polycarbonate casing
Fixture Dimensions : Dia 220mm x H 100mm
Suitable fixing : Surface mount

Applications

: Indoor & commercial



* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

VER3.24