



Product Details :-

Code : LBH1515
Model : Bulk head

Electrical Data :-

Working voltage : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 15 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active
Powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Make : SMD LED, LM80 certified
System efficacy : >110lm/W
Beam angle : Batwing distribution
CCT range : 2700 - 6500K
Secondary optics : Polycarbonate lens
CRI (Ra) : Typical 70
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP65

Light distribution :-

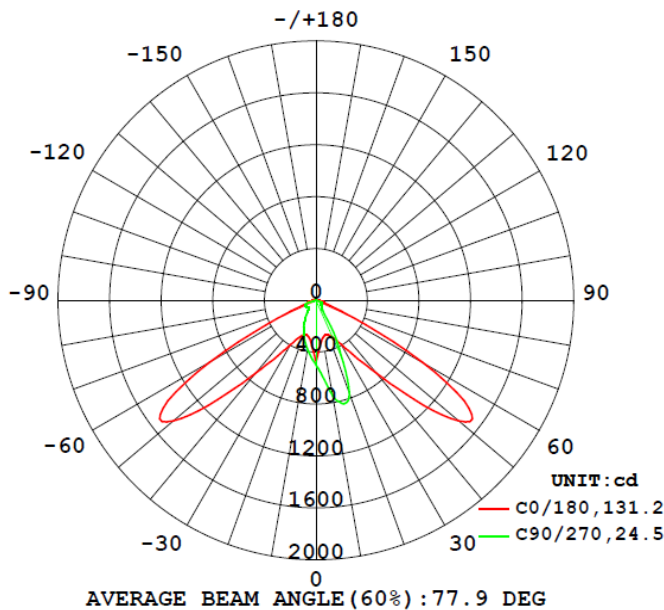

0 Maintenance

50% ENERGY SAVING

ZERO Mercury

Physical Details :-

Material & construction : Extruded aluminum enclosure
Fixture Dimensions : L 135mm x W 78mm x H 50mm
Weight : 0.38 Kgs approx.,
Suitable fixing : Wall mount

Applications : Outdoor & Commercial

In all electrical parameters (+/-10%) tolerance to be considered
* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

Note : The above specification are subjected to change without prior notice

