



Product Details :-

Code : TLF22
Model : PC Model
Series : Tube light

Electrical Data :-

Working voltage range : 100 - 277VAC
Input voltage : 220 - 240VAC
Power : 10 Watt
Power factor : > 0.9
Frequency : 50Hz
THD : < 15%
Driver : Constant current active powerfactor corrected
Driver efficiency : > 85%


Light Data :-

LED Type : SMD LED, LM80 Certified
System efficacy : >80lm/W
Beam angle : Lambertian distribution
CCT range : 2700 - 6500K
CRI : Typical 80
Diffuser : Polycarbonate diffuser
LED Life time : 50,000 hours

Environmental :-

Working temperature : 0°C to + 55 °C
Working humidity : 10 to 90% RH
Storage temperature : -10 °C to + 85 °C
IP rating : IP 20

Light Distribution :-

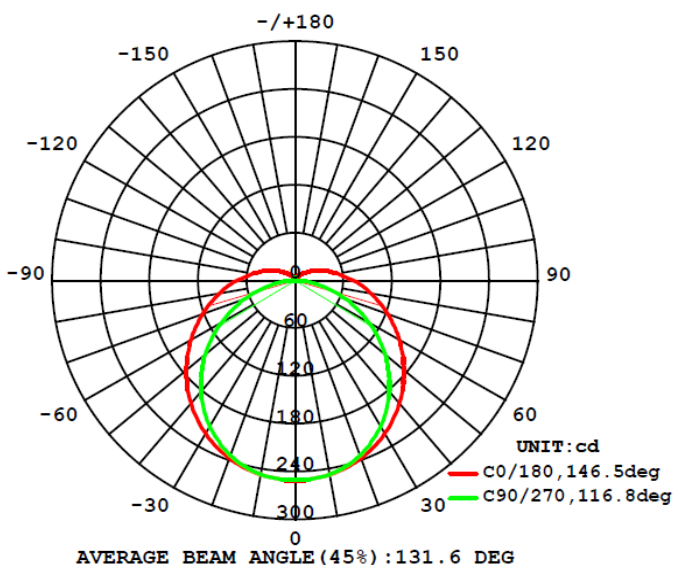

0
Maintenance



ZERO
Mercury

Physical Details :-

Material & Construction : High thermal conductive PC extrusion
Fixture Dimensions : L 542mm x W 22mm x H 40mm
Mounting type : Ceiling / Wall mount

Applications : Indoor, Outdoor & Commercial

* On all electrical parameters (+/-10%) tolerance to be considered

* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

