FortuneArrt LED Lighting Pvt Ltd.,
WQ : Survey no:509/1/2, Apparel Export park,
Gundlapochampally, Hyderabad - 500014
Web : www.fortunearrt.com

Product Technical specification

FA-F/DD-PS 2060

Product Details :-

Code : PPS5080WB440
Model : Linear profile light

0 Maintenance | 50% ENERGY SAVING | ZERO Mercury

Electrical Data :-

Working voltage range	: 100 - 277VAC
Input voltage	: 220 - 240VAC
Power	: 40 Watt
Power factor	: > 0.95
Frequency	: 50Hz
THD	: < 10%
Driver	: Constant current and active power factor corrected
Driver efficiency	: > 85%

Light Data :-

LED Type	: SMD LED, LM80 Certified
Beam angle	: 120 Deg
CCT range	: 2700K - 6500K
CRI	: Typical 80
Diffuser	: Polycarbonate diffuser
LED Life time	: 50,000 hours

Environmental :-

Working temperature	: 0°C to + 55 °C
Working humidity	: 10 to 90% RH
Storage temperature	: -10°C to + 85 °C
IP rating	: IP20

Physical Details :-

Material & Cosntruction	: CC extrusion
Fixture Dimensions	: L 1200mm x W 50mm x H 80mm
Mounting type	: Sutable for Surface & Hanging

Protections :-

Output Over voltage / Under voltage protected	: Provided
Output Over current and Short circuit	: Provided

Applications : Indoor & Commercial

Light distribution:-

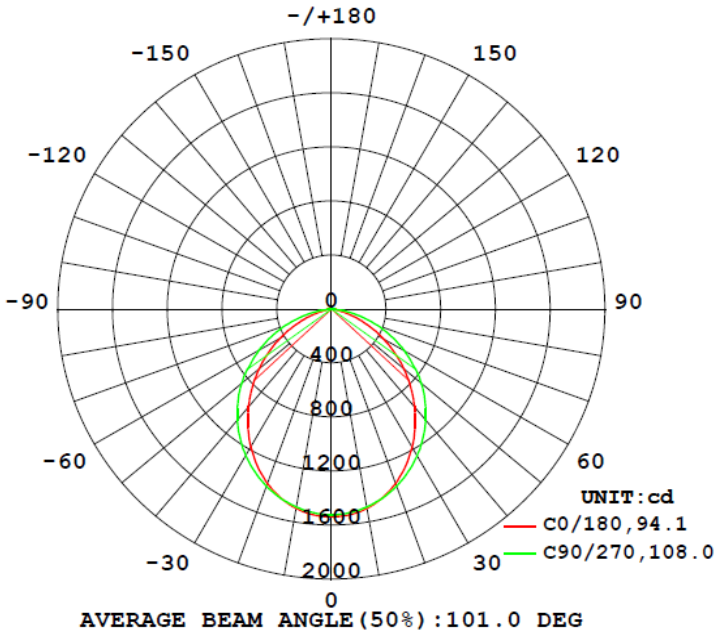

*** On all electrical parameters (+/-10%) tolerance to be considered**

*** On all mechanical dimensions & weight (+/-5%) tolerance to be considered**

Note : The above specification are subjected to change without prior notice

VER1.25