



### Product Details :-

Code : TSRW30/8

Model : Track light

### Electrical Data :-

Working voltage range : 100 - 277VAC

Input voltage : 220 - 240VAC

Power : 30Watt

Power factor : > 0.9

Frequency : 50Hz

THD : < 10%

Driver : Constant current active  
Powerfactor corrected

Driver Efficiency : > 85%

### Light Data :-

LED Type : COB, LM80 Certified

System efficacy : >80lm/W

Beam angle : 36°

CCT range : 2700 - 6500K

CRI (Ra) : Typical 70

Secondary optics : Polycarbonate lens

LED Life time : 50,000 burning hours

### Environmental :-


Working temperature : 0°C to + 55 °C

Working humidity : 10 to 90% RH

Storage temperature : -10°C to + 85 °C

IP rating : IP20

### Light distribution :

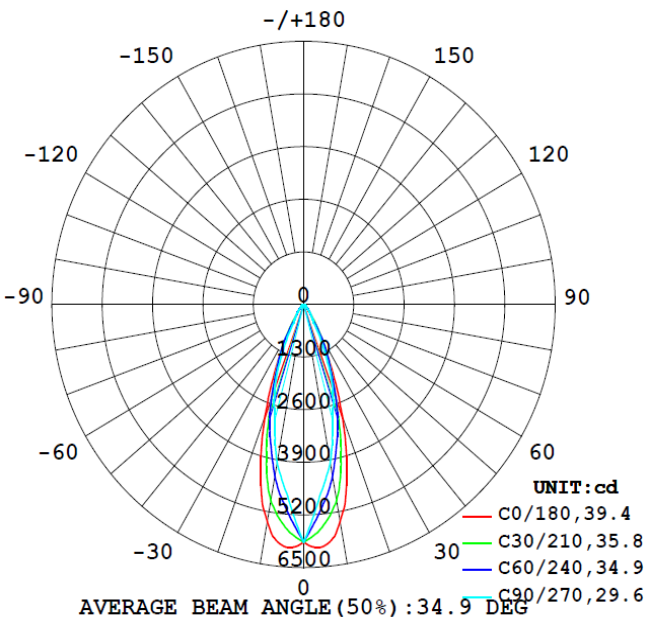

### Physical Details :-

Material & Construction : Extruded aluminum casing

Product finish : White powder coated

Fixture Dimensions : L 174mm x W 80mm x H 220mm

Suitable mounting : Track mount

### Protections :-

Output Over voltage /

Under voltage protected : Provided


Output Over current and

Short circuit : Provided

### Applications

: Indoor, Outdoor & Commercial

### AAI Curve :

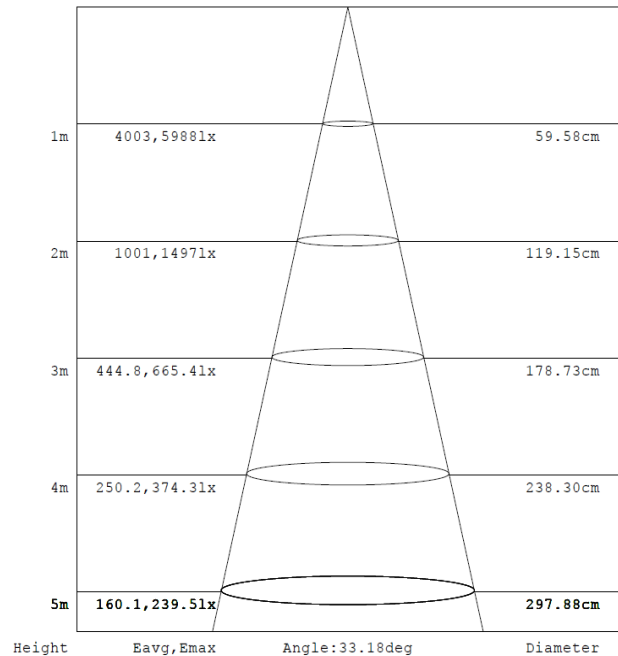

\* On all electrical parameters (+/-10%) tolerance to be considered

\* On all mechanical dimensions & weight (+/-5%) tolerance to be considered

